

## Multi-MPPT String Inverter for 1000 Vdc System

AU



### HIGH YIELD

- 3 MPPTs with max. efficiency 98.6%
- Compatible with bifacial module
- Built-in PID recovery function

### SMART O&M

- Touch free commissioning and remote firmware upgrade
- Smart IV curve scanning \*
- Fuse free design with smart string current monitoring


### SAVED INVESTMENT

- Compatible with Al and Cu AC cables
- DC 2 in 1 connection enabled
- Cable free communication with optional WLAN


### PROVEN SAFETY

- IP66 and C5 anti-corrosion grade
- Quick arc-fault circuit interrupter
- Satisfied global safety and grid code

### CIRCUIT DIAGRAM

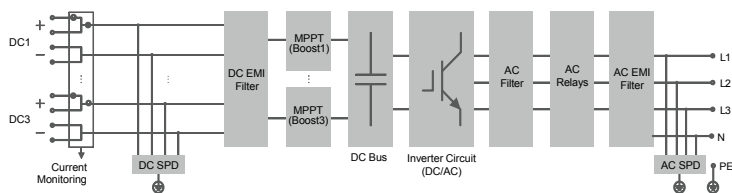

### EFFICIENCY CURVE

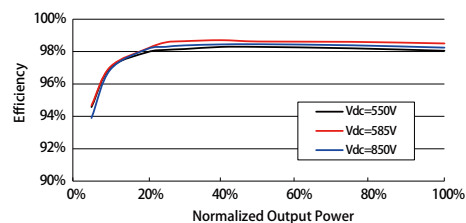

Type designation	SG30CX
<b>Input (DC)</b>	
Max. PV input voltage	1100 V **
Min. PV input voltage / Start-up input voltage	200 V / 250 V
Nominal PV input voltage	585 V
MPP voltage range	200 – 1000 V
No. of independent MPP inputs	3
No. of PV strings per MPPT	2
Max. PV input current	78 A
Max. DC short-circuit current	120 A
<b>Output (AC)</b>	
AC output power	29.9 kVA
Max. AC output current	48.15 A
Nominal AC voltage	3 / N / PE, 230 / 400 V
AC voltage range	312 – 528 V
Nominal grid frequency / Grid frequency range	50 Hz / 45 – 55 Hz, 60 Hz / 55 – 65 Hz
Harmonic (THD)	< 3 % (at nominal power)
Power factor at nominal power / Adjustable power factor	> 0.99 / 0.8 leading – 0.8 lagging
Feed-in phases / AC connection	3 / 3-PE
<b>Efficiency</b>	
Max. efficiency / European efficiency	98.6 % / 98.3 %
<b>Protection and function</b>	
DC reverse polarity protection	Yes
AC short-circuit protection	Yes
Leakage current protection	Yes
Grid monitoring	Yes
Ground fault monitoring	Yes
DC switch	Yes
AC switch	No
PV string monitoring	Yes
Q at night function	Yes
PID recovery function	Yes
Arc fault circuit interrupter (AFCI)	Optional
DC terminal protective cover	Yes
Surge protection	DC Type I+II / AC Type II
<b>General Data</b>	
Dimensions (W * H * D)	702 * 595 * 310 mm
Weight	50 kg
Topology	Transformerless
Degree of protection	IP66
Night power consumption	≤2 W
Operating ambient temperature range	-30 to 60 °C (> 45 °C derating)
Allowable relative humidity range	0 – 100 %
Cooling method	Smart forced air cooling
Max. operating altitude	4000 m (> 3000 m derating)
Display	LED, Bluetooth+APP
Communication	RS485 / WLAN / Optional: Ethernet
DC connection type	MC4 (Max. 6 mm <sup>2</sup> )
AC connection type	OT or DT terminal (Max.70 mm <sup>2</sup> )
Compliance	IEC 62109, IEC 61727, IEC 62116, IEC 60068, IEC 61683, IEC 61000-6-3, AS/NZS 4777.2:2015
Grid Support	Q at night function, LVRT, HVRT, active & reactive power control and power ramp rate control

\* Only compatible with Sungrow Logger, EyeM4 and iSolarCloud

\*\* Max. operating DC voltage is 1000V, max. withstanding DC voltage is 1100 V

